


# Spitfire D38999 Fiber Optic Media Converters




## Features

- Optoelectronic conversion of 10/100Base-TX to 100Base-FX or 1000Base-TX to 1000Base-SX
- Mil-Dtl-38999 with single, dual or quad port Mil-Dtl-29504 fiber optic interface
- Compact size and light weight (<6oz.) for simple mounting and installation
- Samtec ribbon coax / SMT copper electrical and power interface
- Available in a wide choice of platings and base materials
- Operating temperature from -40°C to +85°C

## Protokraft Ethernet Optical Media Converter Block Diagram

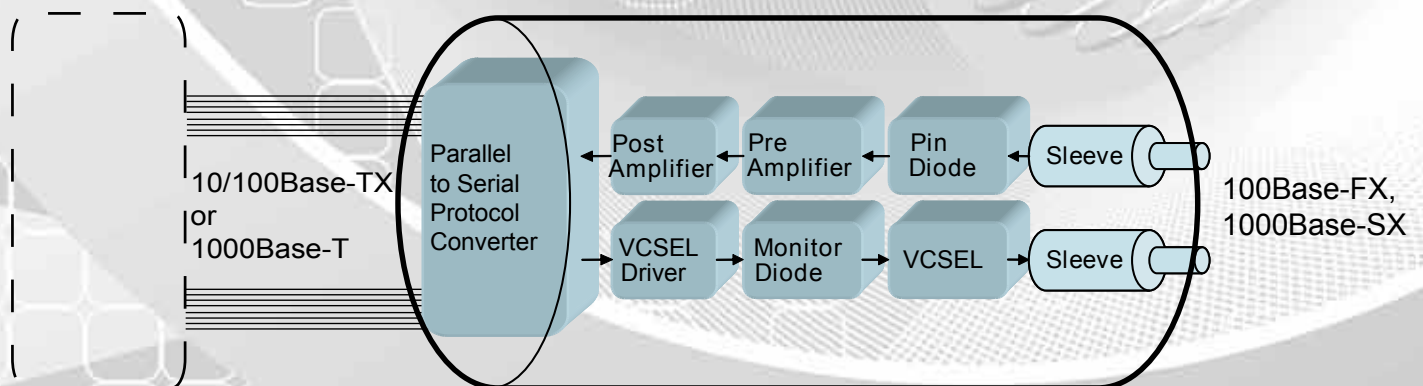

Protokraft Fiber Optic Ethernet Media Converter



**PROTOKRAFT**

**Facilitating Secure Communications in Harsh Environments**

4545 West Stone Drive, Kingsport, TN 37660 USA

Phone: +1.423.578.7200 Fax: +1.423.578.7201

email: [sales@protokraft.com](mailto:sales@protokraft.com)

<http://www.protokraft.com>